

**MADE
IN
ITALY**

E AC PUMPS 300

EN. High flow rate self-priming electric pump with open impeller for diesel fuel transfer applications.

The check valve incorporated in the suction port prevents the siphon effect and ensures automatic repriming.

Max working pressure: 10 bar
Continuous duty with 230 Vac power supply
Cast iron impeller
IP44 protection
2" In/Out connections

ES. *Electrobomba autocebante de alto caudal, con rodete abierto, para trasiego de gasóleo.*

La válvula de retención incorporada en la boca de aspiración impide el efecto sifón y asegura el cebado automático.

*Presión máxima de trabajo 10 bar
Funcionamiento continuo 230 V c.a.
Rodete de hierro fundido
Grado de protección IP44
Entrada/salida 2"*

PT. Bomba elétrica autoaspirante com rotor aberto para transferência de óleo diesel, caracterizada pelo alto fluxo.

A válvula de retenção incorporada na saída de sucção impede o efeito de sifão e garante a aspiração automática.

Pressão máxima de exercício de 10 bar
Funcionamento contínuo de 230 Vac
Rotor em ferro
Proteção IP44
Entrada/Saída de 2"


PERFORMANCE

- Flow rate up to 300 l/min
- Continuous 230 V operation.

- Caudal hasta 300 l/min
- Funcionamiento 230 V continuo


- Caudal até 300 l/min
- Funcionamento contínuo 230 V

DIMENSIONS

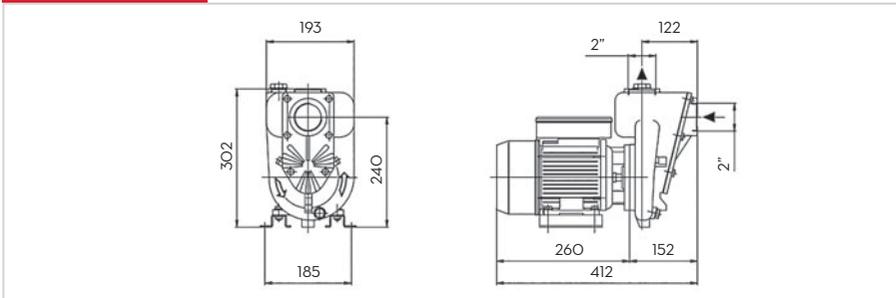


PRODUCTS' RANGE WEIGHT AND PACKAGING


Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
E 300					
F00321000	28	61,7	220x420x330	8,7x16,5x13	1

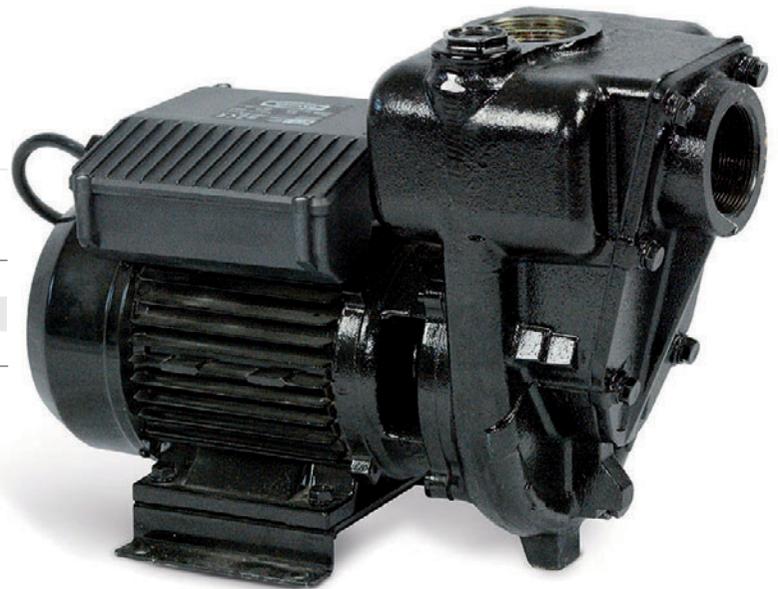


Flow-rate
up to
300 l/min
(up to 79,3 gpm)

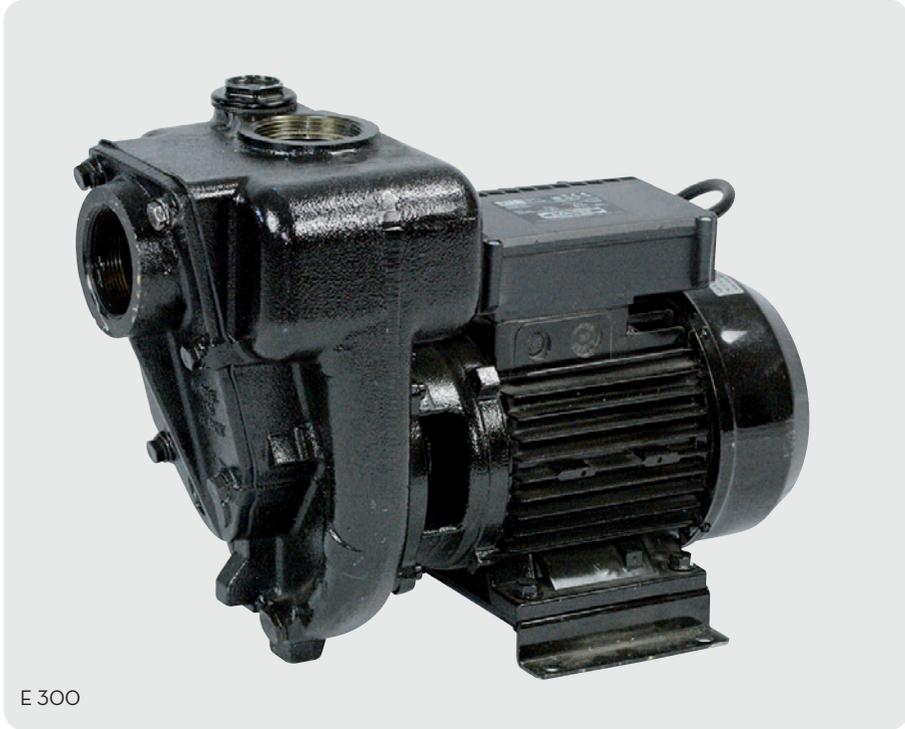

E 300

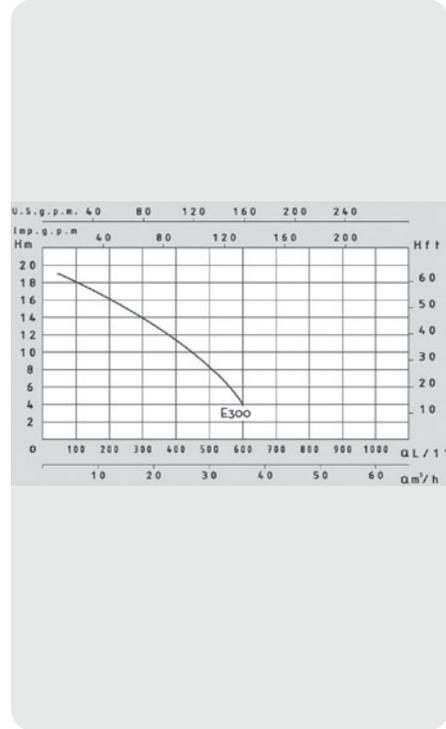

FEATURES



PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		AC Volt/Hz	Voltage		rpm	Inlet Outlet BSP
			l/min	gpm		Power Watt	Amp. max.		
E 300									
F00321000	E 300	D	300	79,3	230/50	1500	9,2	2580	2"

Upon request it is available with different voltage and frequency

- DISPENSERS
- PUMPS
- METERS
- NOZZLE METERS
- NOZZLE
- SPECIAL EQUIPMENTS
- FLUID MONITORING
- ACCESSORIES
- FILTERING